


TED TODD

SPECIFICATION SHEET

HUSK EXTRA WIDE PLANK

Item code: WARE20/009

Collection: Warehouse

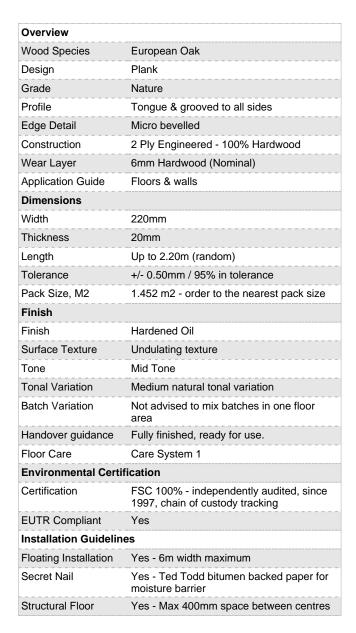



Fully Bond	Yes - Ted Todd MS Flex high strength adhesive
Sub floor Primer	Yes - Ted Todd Primerfast
Underfloor Heating	Yes - please see usage guidelines
Sub Floors	
Concrete	Dry, Flat
Plywood	Yes
Screed	Dry, flat, with Primerfast moisture barrier
Joist	Max 400mm centres
Formed Tread + Riser	Yes - Made to order - 14 day service
L Section, T Section, Reducer, Scotia	Yes - 7 day service
Skirting, Architrave	Yes by request
Technical Information	
Moisture Content	8-12% fair and average moisure content
Slip Rating	Low risk dry. Moderate risk wet.
EN 13501-1 Fire Rating Flooring	Efl
EN 14342 Emissions	E1
Humidity requirements	Between 40 and 60% relative humidity
Origin	European
Janka Hardness Rating	1,120 lbf (4980N)
Formaldehyde Emission	E1
Thermal Conductivity	15mm 0.08m2K/W, 0.8 Tog
Shipping Information	
Shipment times	Largest UK Stocks - available 3 day service
Packaging	Palletised, wrapped + banded
Guarantee	
Guarantee	25 year product warranty
Life Cycle	
Life Span	Generational life span if cared for
Recycle	Value in recycling into upscale uses, worst case outcome carbon neutral









